



**TUBI CORRUGATI E
CALZATI
IN PTFE - CLW CLWB**

**CONVOLUTED PTFE HOSES
AND TUBES - CLW CLWB**

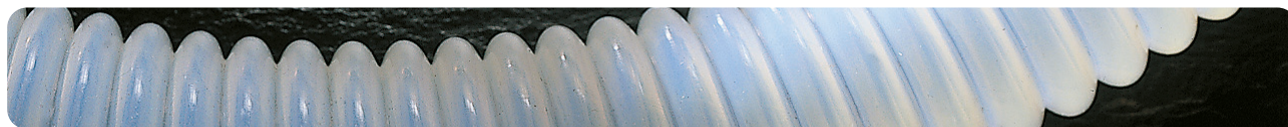

applicazioni:
applications:

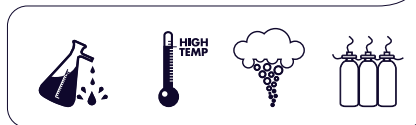

TIPO TYPE	DN	Ø INTERNO INSIDE Ø (mm)	Ø ESTERNO OUTSIDE Ø (mm)	PESI WEIGHTS (gr/mt)	RAGGIO MIN. CURV MIN. BEND RADIUS (mm)
CLW	1/4	6,5	10,5	53	10
CLW	3/8	10	14	80	20
CLW	1/2	13	19	99	25
CLW	5/8	16	22	140	30
CLW	3/4	20	25	173	50
CLW	7/8	22,5	28,5	210	55
CLW	1	25,4	31,50	254	60
CLW	1 - 1/4	32	38	366	80
CLW	1 - 1/2	38	43,5	408	100
CLW	2	51	61	565	200
CLW	2 - 1/2	65	84	910	175
CLW	3	74	92	1200	200
CLW	4	100	125,50	1550	250

DISPONIBILE ANCHE LA VERSIONE CONDUTTIVA. CONDUCTIVE VERSION ALSO AVAILABLE.

